

SUPPLEMENTARY MANUAL

for FIT-SO1

REMOVE THE BLACK FRAME COVERS
BELOW MAIN SEAT.




REMOVE THE MAIN SEAT.



PLUG FI TUNER PRO CONNECTOR TO THE EXPANSION PORT.


(BLACK, 8-POLE CONNECTOR WITH REMOVABLE CAP BELOW MAIN SEAT NEAR FRAME AT LEFT SIDE)

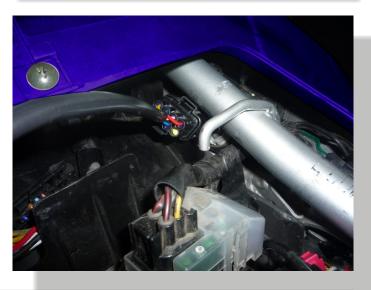



CONNECT FI TUNER PRO PINK/BLACK WIRE TO TPS WIRE.

(LARGE CONNECTOR OF ECU/ECM, PINK/WHITE WIRE, PIN#8)

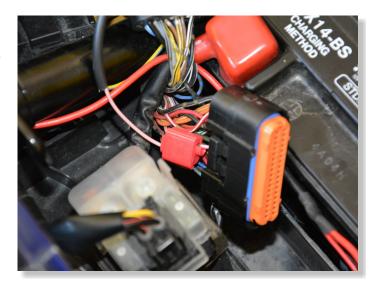

CONNECT FI TUNER PRO YELLOW/BLUE WIRE TO RPM WIRE.

(SMALL CONNECTOR OF ECU/ECM, BROWN/BLACK WIRE, PIN#3)



TYPICAL POSITION FOR FI TUNER PRO.

