

SUPPLEMENTARY MANUAL

for GPDS-KO3

REMOVE THE MAIN AND PASSENGER SEATS.



REMOVE THE FUEL TANK COVER.

LIFT UP OR REMOVE THE


FUEL TANK.



CONNECT DS-SERIES CONNECTOR

DIAGNOSTIC SYSTEM CONNECTOR.

(BLACK, 4-POLE KDS CONNECTOR WITH DUMMY PLUG (WITHOUT WIRES)
BELOW REAR FAIRING AT THE RIGHT SIDE))

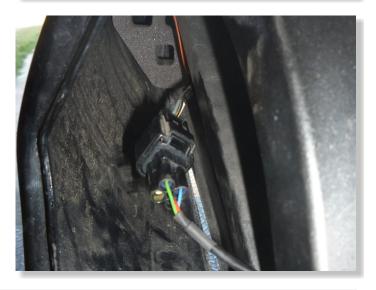



TYPICAL POSITION FOR THE GEAR INDICATOR.

