

# Honda MSX125 / Grom [non-ABS]


2013-2016



## SUPPLEMENTARY MANUAL


for GPX-H03

REMOVE THE FAIRING AND THE  
FRAME COVER  
UNDER SEAT AT LEFT SIDE.

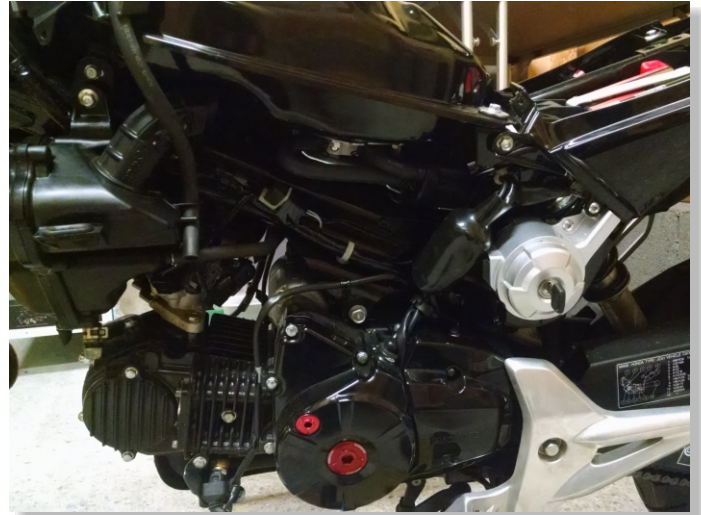


LOCATE THE SPEED SENSOR  
CONNECTORS IN THE DUST BOOT  
AND DISCONNECT IT.  
(TRANSPARENT, 3-POLE CONNECTOR  
WITH GREEN AND PINK WIRE AND 1-POLE CONNECTOR  
WITH WHITE/GREEN WIRE.)

ROUTE THE GPX CABLE THROUGH  
THE TOP OPENING OF THE DUST  
BOOT.

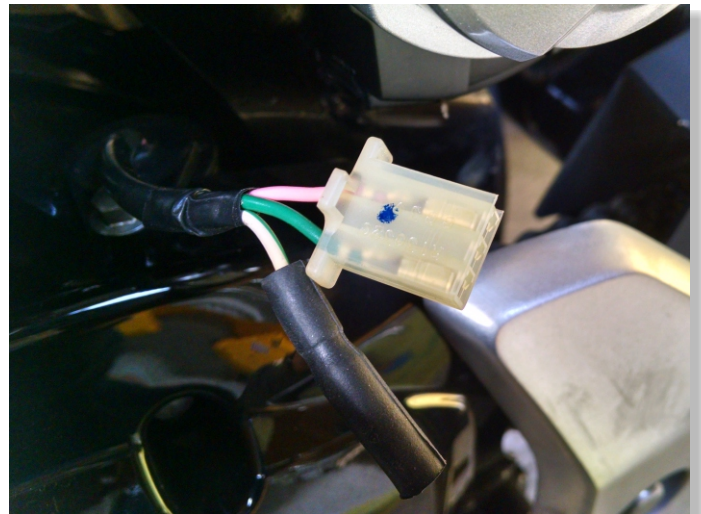

PLUG THE GPX CONNECTORS IN-  
LINE WITH THE SPEED SENSOR  
CONNECTORS.

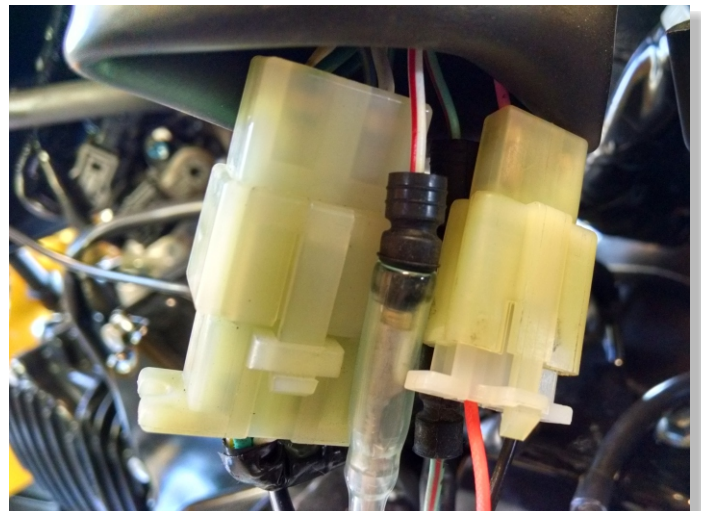

# Honda MSX125 / Grom [non-ABS]


2013-2016



## SUPPLEMENTARY MANUAL

for GPX-H03

CONNECT THE GPX BLACK/GREEN  
WIRE TO THE  
YELLOW/GREEN WIRE OF THE  
ECU/ECM CONNECTOR.  
(BLACK CONNECTOR ON LEFT SIDE)

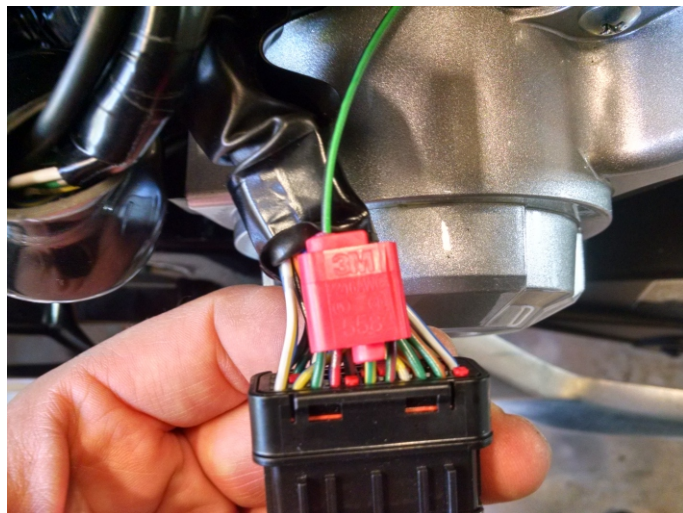

TYPICAL POSITION FOR THE  
GEAR INDICATOR.

