SUPPLEMENTARY MANUAL

for SH-KO6

REMOVE THE FRAME COVERS BELOW MAIN SEAT.



REMOVE THE MAIN SEAT.




LIFT UP OR REMOVE THE FUEL TANK.





PLUG SPEEDOHEALER CONNECTORS IN-LINE WITH THE VEHICLE SPEED SENSOR (VSS) CONNECTORS.

(BLACK, 3-POLE CONNECTORS AT LEFT SIDE BEHIND WATER HOSE)

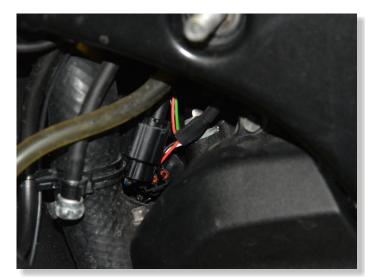

TYPICAL POSITION FOR SPEEDOHEALER.



SPEEDOHEALER