

Triumph Speed Triple 2005-2010



SUPPLEMENTARY MANUAL

for QSE-1 + QSH-P4A

REMOVE THE MAIN SEAT.



REMOVE THE FUEL TANK.



REMOVE THE AIRBOX.



Triumph Speed Triple 2005-2010




PLUG QSH CONNECTORS IN-LINE WITH THE IGNITION COIL CONNECTORS.

(BLACK, 2-POLE CONNECTORS BELOW AIRBOX.)

MAKE SURE THE QSH PLUGS MARKED WITH RED
SQUARE ARE CONNECTED, AND LEAVE ONE COUPLER
UNUSED)




CONNECT QSH BLACK WIRE TERMINAL TO CHASSIS GROUND.

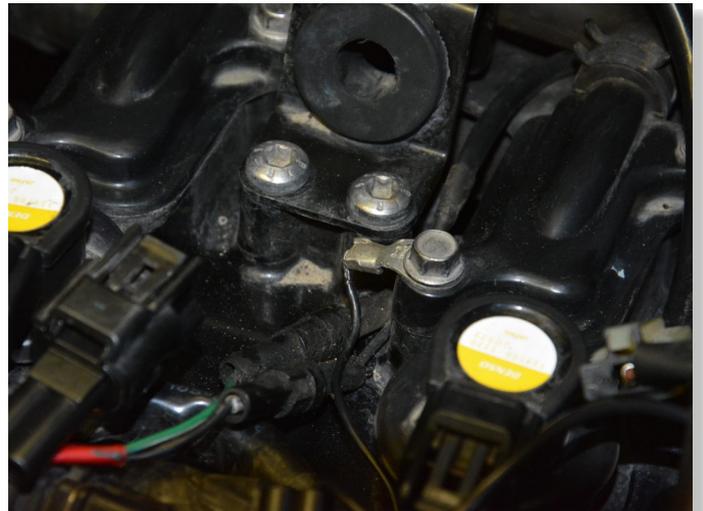

MOUNT THE QSE SENSOR.

(USE THE NEW BOLT AND WASHERS SUPPLIED WITH
THE UNIT. MAKE SURE TO PLACE ONE WASHER ABOVE
THE SENSOR AND ONE WASHER BELOW THE SENSOR.
TIGHTEN THE SCREW BY 3-4 NM.

WHEN TIGHTENED, DO NOT TRY TO ROTATE THE
SENSOR BODY.)

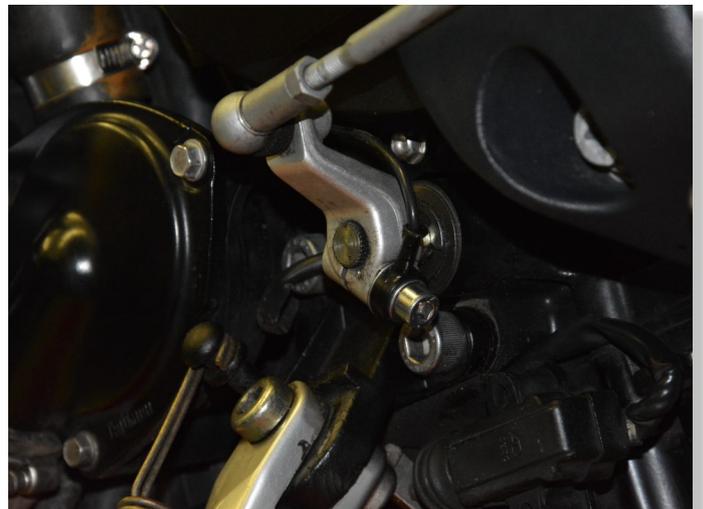

Triumph Speed Triple 2005-2010



TYPICAL POSITION FOR THE
QUICKSHIFTER EASY.

