

SUPPLEMENTARY MANUAL


for GPDS-HO1

REMOVE THE MAIN AND PASSENGER SEATS.

LIFT UP OR REMOVE THE FUEL TANK.




REMOVE THE RIGHT BLACK FRAME COVER BELOW THE MAIN SEAT.



CONNECT DS-SERIES CONNECTOR
TO

DIAGNOSTIC SYSTEM CONNECTOR.

(RED, 4-POLE CONNECTOR WITH RED CAP AT THE RIGHT SIDE)

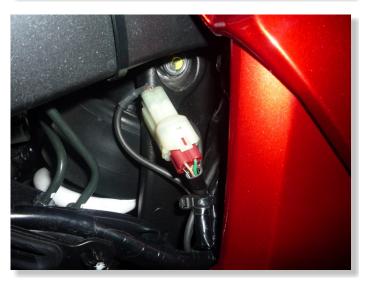





TYPICAL POSITION FOR THE GEAR INDICATOR.

