



SUPPLEMENTARY MANUAL

for QSE-1 + QSX-P4B

REMOVE THE SIDE COVERS
FROM FUEL TANK.



REMOVE THE
MAIN AND PASSANGER SEAT.



REMOVE THE FUEL TANK.



Suzuki GSX-R1000

2009-2015



REMOVE THE AIRBOX.



**PLUG QSX CONNECTORS IN-LINE
WITH THE IGNITION COIL
CONNECTORS.**
(BLACK, 2-POLE CONNECTORS BELOW AIRBOX)



**MOUNT THE QSX MODULE TO THE
INNER SIDE OF THE FRAME BY THE
SUPPLIED VELCRO STRIPS,
AND SECURE THE CABLES WITH
CABLE TIES.**
(AVOID DIRECT CONTACT WITH HEAT SOURCES,
LIKE THE CYLINDER HEAD.)



Suzuki GSX-R1000

2009-2015




**CONNECT QSX BLACK WIRE
TERMINAL TO CHASSIS GROUND.**



MOUNT THE QSE SENSOR.

(USE THE NEW BOLT AND WASHERS SUPPLIED WITH THE UNIT. MAKE SURE TO PLACE ONE WASHER ABOVE THE SENSOR AND ONE WASHER BELOW THE SENSOR. TIGHTEN THE SCREW BY 3-4 NM.

WHEN TIGHTENED, DO NOT TRY TO ROTATE THE SENSOR BODY.)

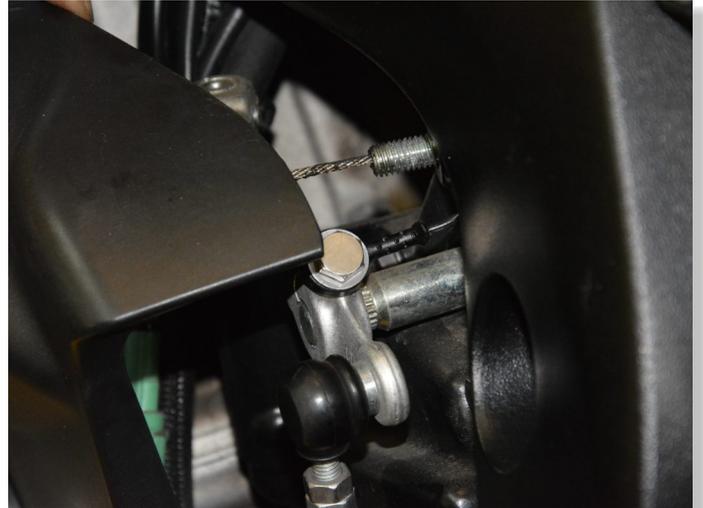

**TYPICAL POSITION FOR THE
QUICKSHIFTER EASY.**

