



SUPPLEMENTARY MANUAL

for SH-SO1

REMOVE THE BLACK COVERS FROM FUEL TANK.



REMOVE THE MAIN SEAT.



LIFT UP OR REMOVE THE FUEL TANK.








PLUG SPEEDOHEALER CONNECTORS IN-LINE WITH THE VEHICLE SPEED SENSOR (VSS) CONNECTORS.

(BLACK, 3-POLE CONNECTORS AT LEFT SIDE BELOW FUEL TANK)

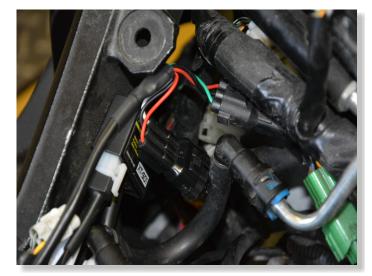

TYPICAL POSITION FOR SPEEDOHEALER.

