

SUPPLEMENTARY MANUAL

for SH-YO1

REMOVE THE MAIN SEAT.




REMOVE THE BLACK
FUEL TANK COVERS
LIFT UP OR REMOVE THE
FUEL TANK.



PLUG SPEEDOHEALER CONNECTORS
IN-LINE WITH THE VEHICLE SPEED
SENSOR (VSS) CONNECTORS.

(BLACK AND WHITE, 3-POLE CONNECTORS AT RIGHT SIDE BELOW FUEL TANK)

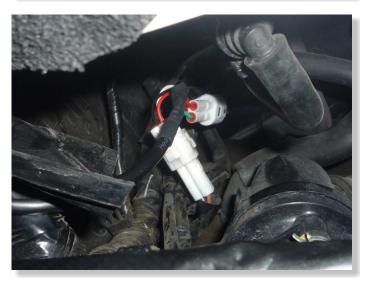







TYPICAL POSITION FOR SPEEDOHEALER.

