

Suzuki GSX-R600


2008-2009



SUPPLEMENTARY MANUAL

for QSE-1 + QSX-P4B


REMOVE THE SEATS.
REMOVE THE REAR FAIRING
FROM LEFT SIDE.

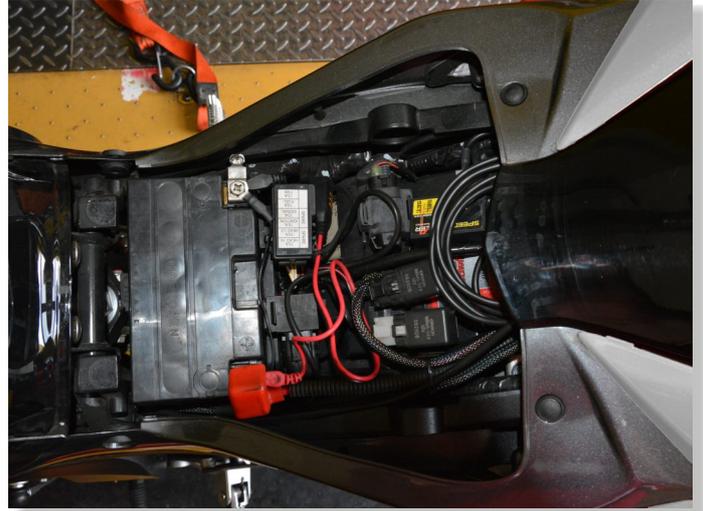

REMOVE THE FUEL TANK.



REMOVE THE AIRBOX.

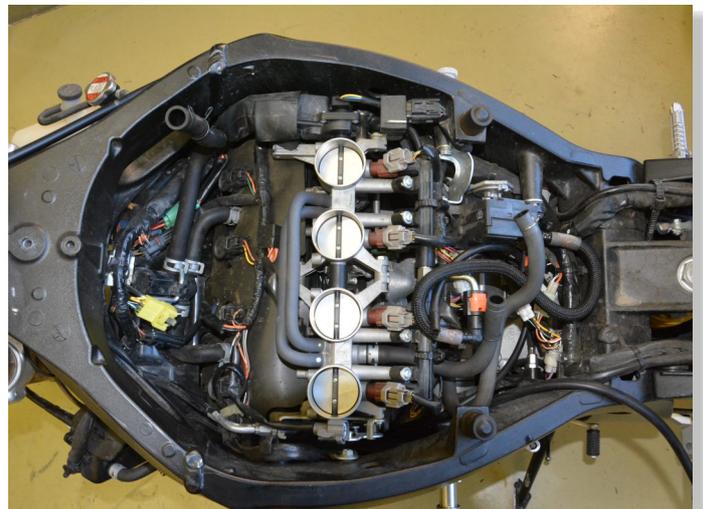

Suzuki GSX-R600

2008-2009



**PLUG Q SX CONNECTORS IN-LINE
WITH THE IGNITION COIL
CONNECTORS.**

(BLACK, 2-POLE CONNECTORS BELOW AIRBOX)



**MOUNT THE Q SX MODULE TO THE
INNER SIDE OF THE FRAME WITH
THE SUPPLIED VELCRO STRIPS,
AND SECURE THE CABLES WITH
CABLE TIES.**

(AVOID DIRECT CONTACT WITH HEAT SOURCES,
LIKE THE CYLINDER HEAD.)



**CONNECT Q SX BLACK WIRE
TERMINAL TO CHASSIS GROUND.**



Suzuki GSX-R600

2008-2009



MOUNT THE QSE SENSOR.

(PLACE THE CONICAL WASHERS SUPPLIED AT THE TWO SIDES OF THE SENSOR LIKE THIS: (D). TIGHTEN THE LOCKNUT TO THE WASHER BY HAND FULLY AND THEN BY 1/4 TURN USING A WRENCH.

FOR DIFFERENT MOUNTING OPTIONS, REFER TO THE SENSOR INSTALL GUIDE.)



TYPICAL POSITION FOR THE QUICKSHIFTER EASY.

