

SUPPLEMENTARY MANUAL

for GPX-KT1

REMOVE THE SCREEN.

REMOVE THE

LEFT COVER FROM HEADLIGHT.


REMOVE THE MIRRORS CONSOLE.

REMOVE THE DASHBOARD UNIT.



PLUG GPX CONNECTORS IN-LINE
WITH THE SPEED SENSOR
CONNECTORS.

(WHITE, 3-POLE TRIANGLE CONNECTORS BELOW DASHBOARD UNIT)

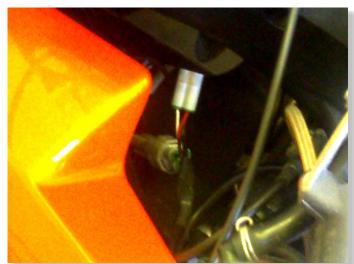

CONNECT GPX BLACK/GREEN WIRE
TO
TACHO SIGNAL WIRE OF DASHBOARD
CONNECTOR.

(BLACK/BRAUN WIRE, PIN #10, TOP ROW, 4TH WIRE FROM LEFT TO RIGHT AT THE BACK/WIRE SIDE OF THE PLUG)







TYPICAL POSITION FOR THE GEAR INDICATOR.

