Triumph ST1050 Sprint



SUPPLEMENTARY MANUAL


for GPX-TO1

REMOVE THE MAIN SEAT. LIFT UP OR REMOVE THE FUEL TANK.



PLUG GPX CONNECTORS IN-LINE WITH THE SPEED SENSOR CONNECTORS.

(BLACK, 3-POLE CONNECTORS AT LEFT SIDE NEAR FRAME)

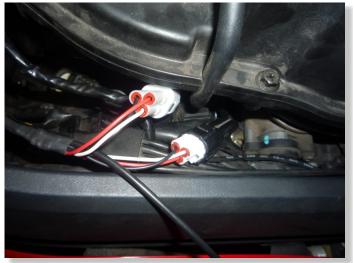

CONNECT GPX BLACK/GREEN WIRE

BLUE/PURPLE WIRE OF CRANKSHAFT POSITION SENSOR.

(BLACK, 2-POLE CONNECTOR
WITH BLUE/PURPLE AND BLUE/BLACK WIRES
AT LEFT SIDE BELOW FUEL TANK)





Triumph ST1050 Sprint



TYPICAL POSITION FOR THE GEAR INDICATOR.

