



SUPPLEMENTARY MANUAL

for GPX-U01


REMOVE THE MAIN SEAT.
LIFT UP OR REMOVE THE
FUEL TANK.
LOCATE THE SPEED SENSOR
CONNECTOR.
ROUTE THE GPX CABLE THROUGH
THE TOP OPENING OF THE
DUST BOOT



CONNECT GPX RED WIRE TO
RED WIRE OF SPEED SENSOR
CONNECTOR.
(TRANSPARENT, 3-POLE CONNECTOR IN DUST BOOT
BEHIND WATER RESORVOIR TANK)




CONNECT GPX WHITE WIRE TO
GRAY/WHITE WIRE OF SPEED SENSOR
CONNECTOR.
(TRANSPARENT, 3-POLE CONNECTOR IN DUST BOOT
BEHIND WATER RESORVOIR TANK)

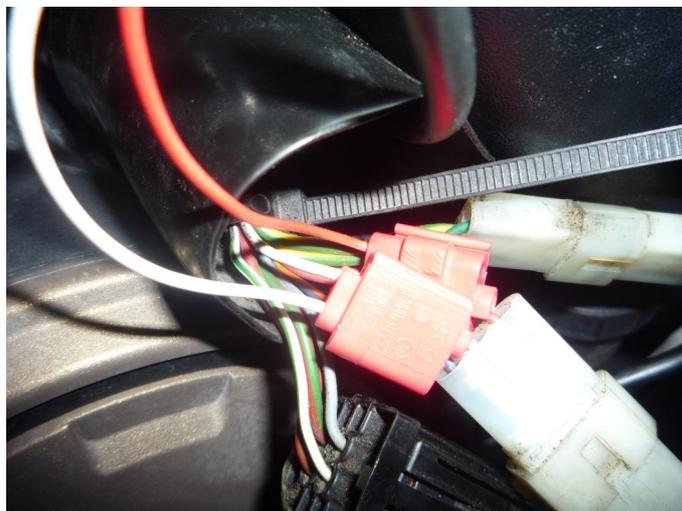


Aprilia Tuono 2006-2010



**CONNECT GPX BLACK WIRE TO
BLUE/ORANGE WIRE OF
SPEED SENSOR CONNECTOR.**
(TRANSPARENT, 3-POLE CONNECTOR IN DUST BOOT
BEHIND WATER RESORVOIR TANK)

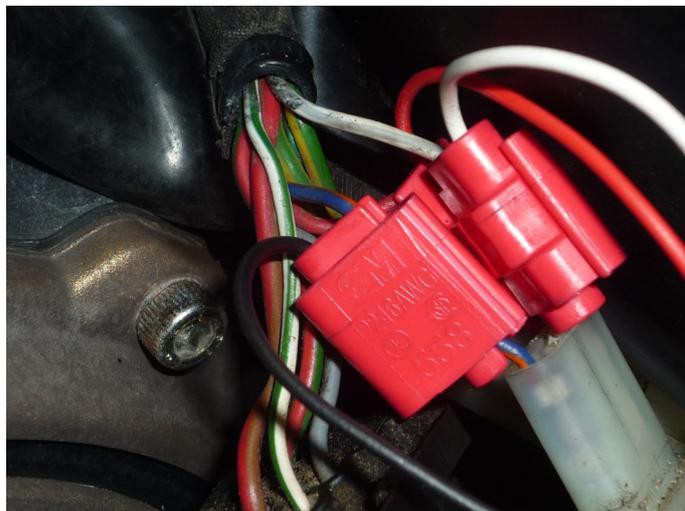

**CONNECT GPX GREEN WIRE TO
BLUE/YELLOW WIRE OF CAMSHAFT
POSITION SENSOR CONNECTOR.**
(BLACK, 3-POLE CONNECTOR
ON CYLINDER HEAD AT THE LEFT)

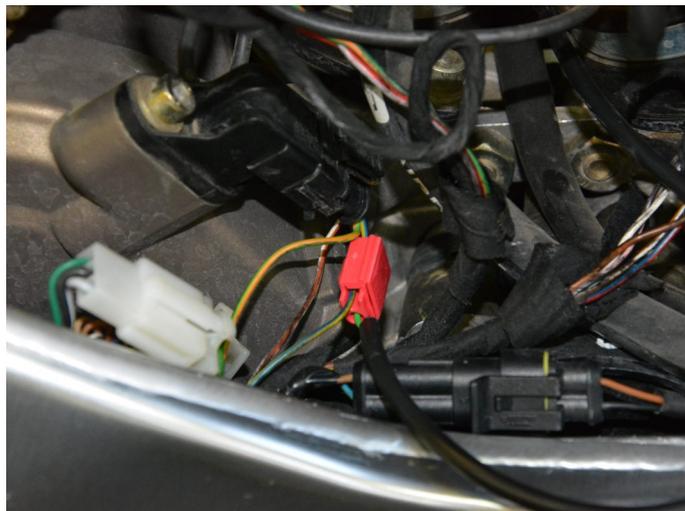

**TYPICAL POSITION FOR THE
GEAR INDICATOR.**

