

SUPPLEMENTARY MANUAL

for GPX-YO1

REMOVE THE SEAT.
REMOVE THE BLACK FRAME COVERS
BELOW SEAT.
LIFT UP OR REMOVE THE
FUEL TANK.



PLUG GPX CONNECTORS IN-LINE WITH THE SPEED SENSOR CONNECTORS.


(WHITE, 3-POLE TRIANGULAR CONNECTORS AT RIGHT SIDE BELOW FRAME COVER)



CONNECT GPX BLACK/GREEN WIRE

GRAY WIRE OF ECU/ECM CONNECTOR.

(BLACK CONNECTOR AT RIGHT SIDE BELOW FRAME COVER)

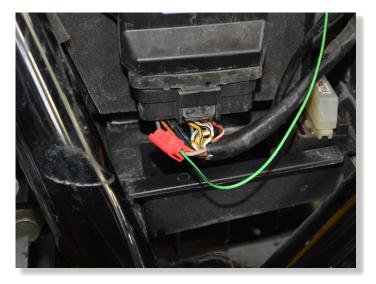



CONNECT GPX RED WIRE TO BROWN WIRE OF REAR BRAKELIGHT SWITCH CONNECTOR.

(BLACK, Z-POLE CONNECTOR AT RIGHT SIDE BELOW FRAME COVER)



TYPICAL POSITION FOR THE GEAR INDICATOR.

