

# Kawasaki ZX-10R

2004-2005



## SUPPLEMENTARY MANUAL

for QSE-1 + QSH-P4A

REMOVE THE  
PASSANGER SEAT.



REMOVE THE COVER  
BETWEEN THE SEATS.



REMOVE THE MAIN SEAT.




# Kawasaki ZX-10R

2004-2005




REMOVE THE FRAME COVERS  
BELOW FUEL TANK AND MAIN SEAT.

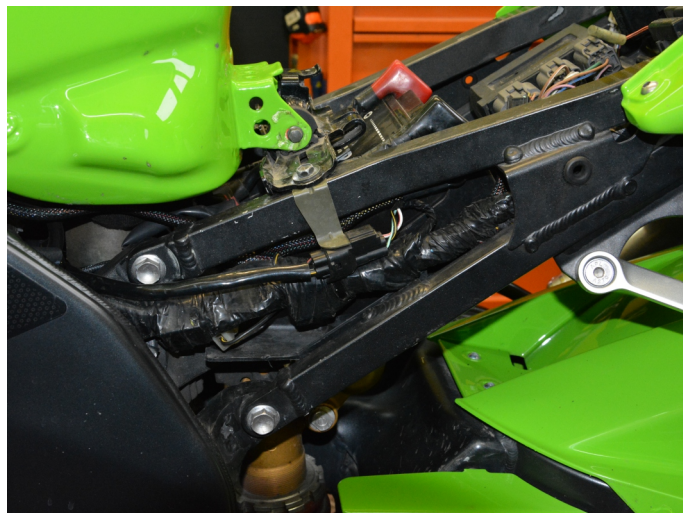

LIFT UP OR REMOVE  
THE FUEL TANK.



REMOVE THE AIRBOX.

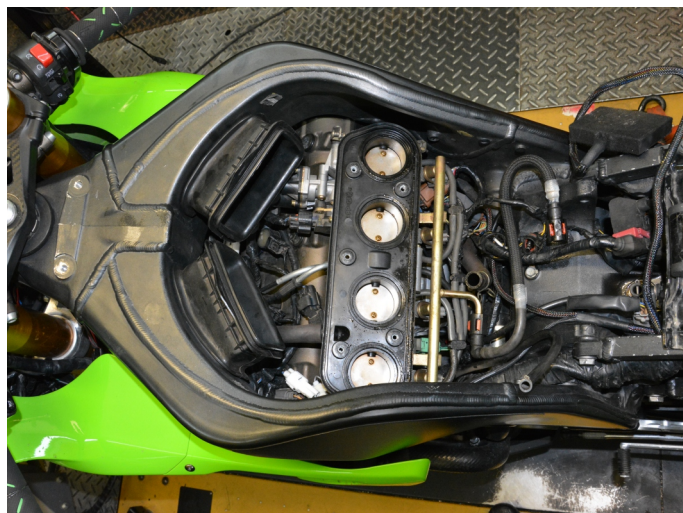


# Kawasaki ZX-10R

2004-2005




**PLUG QSH CONNECTORS IN-LINE  
WITH THE IGNITION COIL  
CONNECTORS.**

(BLACK, 2-POLE CONNECTORS BELOW AIRBOX)

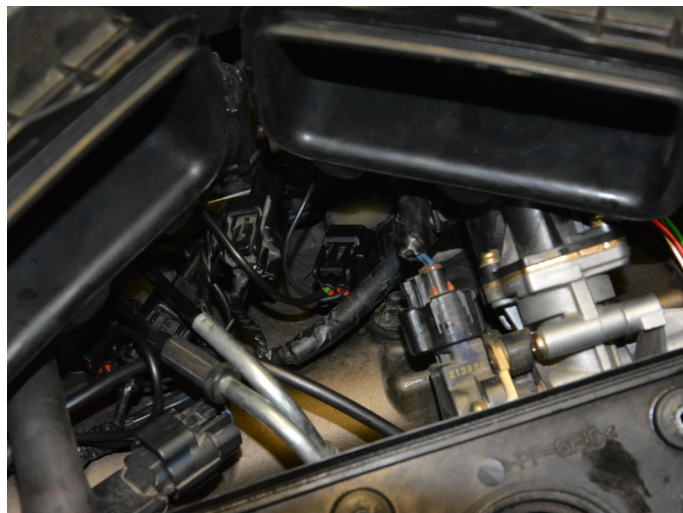


**CONNECT QSH BLACK WIRE  
TERMINAL TO CHASSIS GROUND.**

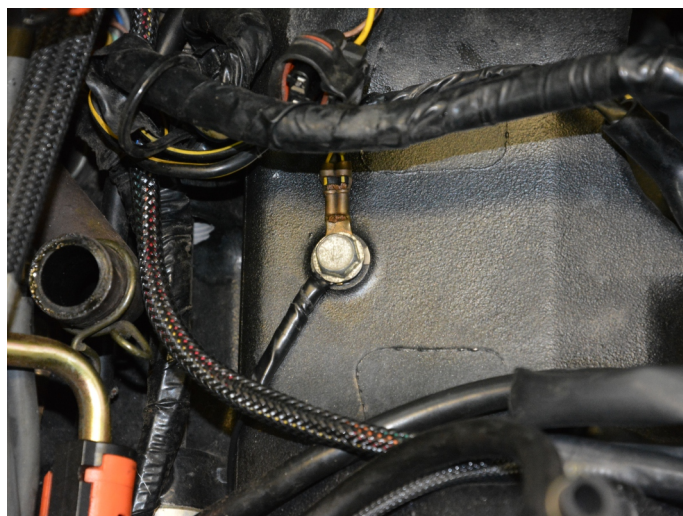

**MOUNT THE QSE SENSOR.**

(REPLACE THE BOLT WITH THE ONE SUPPLIED.  
PLACE THE CONICAL WASHERS AT THE TWO SIDES OF  
THE SENSOR LIKE THIS: (O). TIGHTEN THE BOLT IN  
THIS POSITION BY ABOUT 5 NM. IF YOU DO NOT HAVE  
A TORQUE WRENCH, TIGHTEN THE BOLT UNTIL THE  
SHIFT ARM IS TIGHT ON THE GEARBOX SHAFT.

FOR DIFFERENT MOUNTING OPTIONS,  
REFER TO THE SENSOR INSTALL GUIDE.)

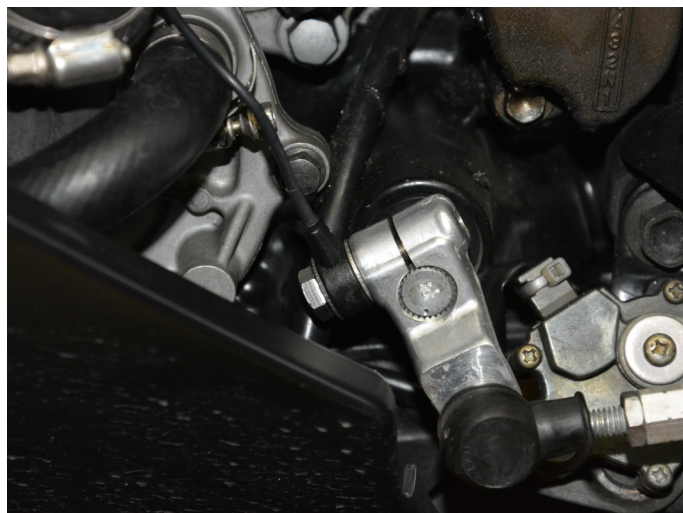

# Kawasaki ZX-10R

2004-2005



TYPICAL POSITION FOR THE  
QUICKSHIFTER EASY.

