

# Yamaha MT-09 Tracer / FJ-09

2015-



## SUPPLEMENTARY MANUAL

for SLP-U01

REMOVE THE LOWER SIDE FAIRINGS.



REMOVE THE FAIRINGS AROUND THE  
FUEL TANK.



REMOVE THE PLASTIC SIDE COVERS  
NEAR THE DASHBOARD.



# Yamaha MT-09 Tracer / FJ-09

2015-




## SUPPLEMENTARY MANUAL

for SLP-U01

REMOVE THE FUEL TANK.




CONNECT THE SLP BLACK/GREEN  
WIRE TO THE GREY WIRE AT THE  
ECU CONNECTOR.

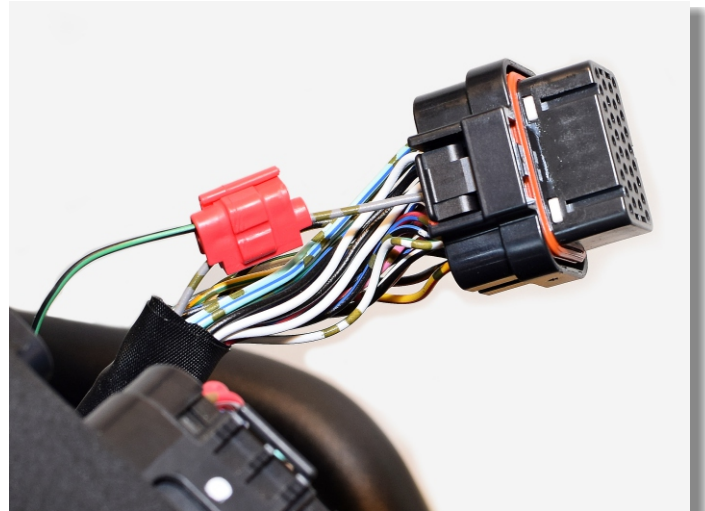

LOCATE THE START/ENGINE STOP  
SWITCH CONNECTOR AT THE RIGHT  
SIDE.

(WHITE, 4-POLE RECTANGULAR CONNECTOR.)

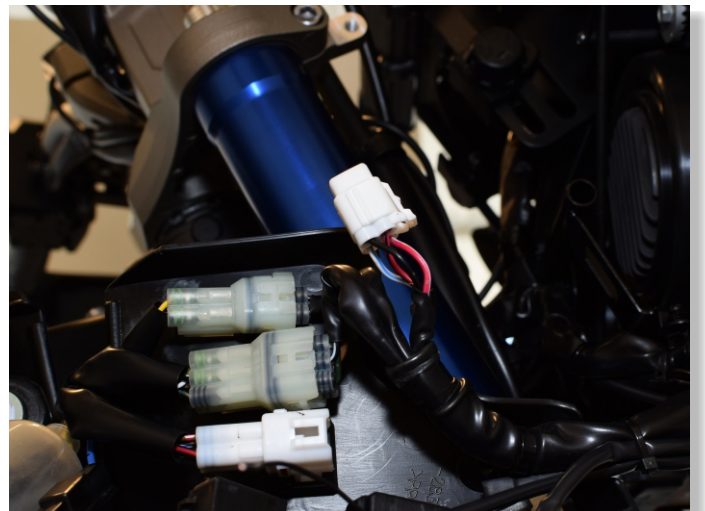

# Yamaha MT-09 Tracer / FJ-09

2015-



## SUPPLEMENTARY MANUAL

for SLP-U01

CONNECT THE SLP RED WIRE TO  
THE RED/WHITE WIRE OF THE  
START/ENGINE STOP SWITCH  
CONNECTOR.

CONNECT THE SLP BLACK WIRE TO  
THE BLACK WIRE OF THE  
START/ENGINE STOP SWITCH  
CONNECTOR.



TYPICAL POSITION FOR THE  
SHIFT LIGHT.

SECURE THE UNIT PROPERLY.

(SHOWN WITH THE OPTIONAL GIPRO MOUNT,  
PART NO.: GIPRO-M-BK)

